

Compact HE rectifiers for small to medium telecom applications

The Flatpack S rectifiers incorporate Telecom specifications, high efficiency, ORing protection on output and high power in a small, 217 mm deep box.

Used in the 1U high, 2 or 3 rectifier positions power rack with Smartpack S controller and battery and load distributions, the Flatpack S rectifiers cover 2 to 5.4kW applications using a minimum of space, less than 6 liters, and low heat dissipation.



FLATPACK S 48V RECTIFIERS

1000W HE & 1800W HE

Doc 241122.1x5.DS3 - v1

APPLICATIONS

TELECOM - MOBILE / WIRELESS

- RADIO BASE STATIONS/ CELL SITES
- LTE / 4G / WIMAX
- DISTRIBUTED ANTENNA SYSTEMS
- MICROWAVE
- BROADBAND


TELECOM - FIXED

- TELEPHONY SERVERS / SWITCHES
- FIBER OPTICS / FTTX
- MICROWAVE
- CABLE
- BROADBAND



KEY FEATURES

- SMALL
- SHORT
- POWER DENSITY - 47 W/INCH³
- HIGH EFFICIENCY
- ORING PROTECTION ON OUTPUT
- HOT PLUG-ABLE
- VOLTAGE AND POWER KEYING

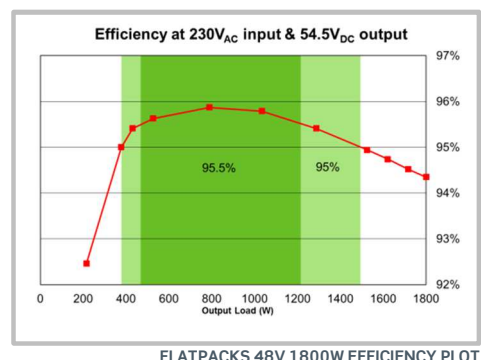

FLATPACK S 48V RECTIFIERS



1000W HE & 1800W HE

Model	48/1000 HE	48/1800 HE
Part number	241122.105	241122.125
INPUT DATA		
Voltage (nominal)	185 - 270 V _{AC} / 185 - 250 V _{DC} ¹⁾	195 - 277 V _{AC} / 195 - 250 V _{DC} ¹⁾
Voltage (operating range)	85 - 300 V _{AC} / 85 - 250 V _{DC} ¹⁾	85 - 305 V _{AC} / 85 - 250 V _{DC} ¹⁾
Current (maximum) @ nominal input, full load	5.9 A _{RMS}	9.9 A _{RMS}
Frequency	45 - 66 Hz / 0 Hz ¹⁾	
Power Factor	> 0.99 at 50% load or more	
Protection	Fuse in L & N Varistor Shutdown when input voltage is out of operating range	
OUTPUT DATA		
Voltage (default)	53.5 V _{DC}	
Voltage (adjustable range)	43.5 - 57.6 V _{DC}	
Power (maximum) @ nominal input	1000 W	1800 W
Power @ 85 V _{AC}	420 W	700 W
Current (maximum) @ nominal input	20.9 A (@V _{OUT} < 48V _{DC})	37.5 A (@V _{OUT} < 48V _{DC})
Hold up time, maximum output power	>20ms; output voltage > 41 V _{DC}	>10ms; output voltage > 42 V _{DC}
Current sharing (10 - 100% load)	±5% of maximum current from 10 to 100% load	
Static Voltage regulation (10 - 100% load)	±0.5%	
Dynamic Voltage regulation	±5.0% for 10-90% or 90-10% load variation, regulation time < 50ms	
Ripple	< 150 mV _{PP} , 30 MHz bandwidth	
Protection	ORing FET Short circuit proof High temperature protection Over voltage Shutdown	
OTHER SPECIFICATIONS		
Efficiency	Up to 95.5 %	Up to 95.8 %
Isolation	3.0 kV _{AC} - input to output 1.5 kV _{AC} - input to earth 710 V _{DC} - output to earth	
Alarms: Red LED	Low and high input voltage shutdown, High and low temperature shutdown, Rectifier Failure, Overvoltage shutdown on output, Fan failure, Low output voltage alarm, CAN bus failure	
Warnings: Yellow LED	Rectifier in power derate mode, Remote output current limit activated, Input voltage out of range, flashing at overvoltage, Loss of CAN communication with controller	
Normal operation: Green LED		
MTBF (Telcordia SR-332 Issue I method III (a))	>315 000 (@ T _{ambient} : 25 °C)	>300 000 (@ T _{ambient} : 25 °C)
Operating temperature (5-95% RH n.cond. hum.)	-40 to + 85°C [-40 to +185°F]	
Maximum output power derates above temp / to	45°C [113°F] / 600W @ 85°C[185°F]	45°C [113°F] / 1000W @ 85°C[185°F]
Storage temperature	-40 to +85°C (-40 to +185°F), humidity 0 - 99% RH non-condensing	
Dimensions[WxHxD] / Weight	72 x 41.5 x 217mm (2.83 x 1.63 x 8.54") / < 850 g (1.9 lbs)	
DESIGN STANDARDS		
Electrical safety	UL 60950-1, EN 60950-1	
EMC	ETSI EN 300 386 EN 61000-6-1 / -2 / -3 / -4 TS 61000-6-5 FCC CFR 47 Part 15	
Environment	ETSI EN 300 019: 2-1 (Class 1.2), 2-2 (Class 2.3) & 2-3 (Class 3.2) RoHS (2011/65/EU) and WEEE (2002/96/EC) compliant	
1) DC input only allowed when up-stream breaker is rated for the applicable DC input voltage and has a maximum current rating of 32A		